

IRIS / IR CUT


## 雙磁閥系列

### Application

For Security & Surveillance System

CCTV Lens Van-Focal Auto Iris

### Specification 11PSI0700012

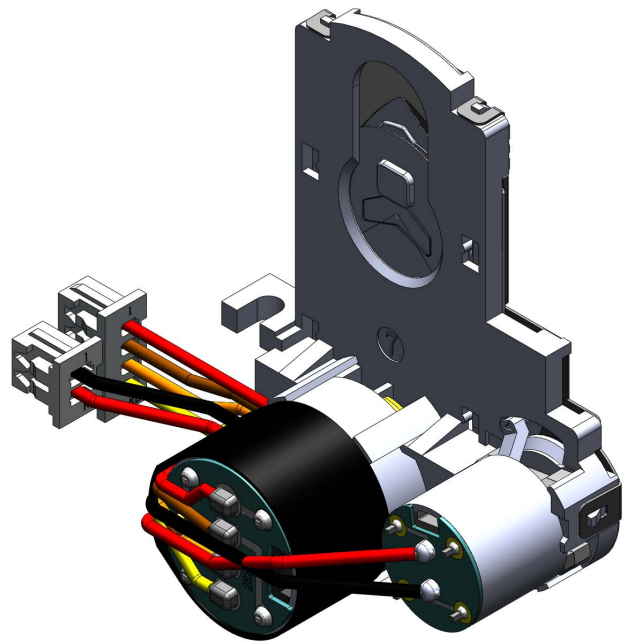

| Item               | Aperture specification         |
|--------------------|--------------------------------|
| Drive impedance    | $190\Omega \pm 10\%$ (at 20°C) |
| Braking resistance | $855\Omega \pm 10\%$ (at 20°C) |
| Turn on voltage    | 2.5V max.                      |
| Turn off voltage   | 0.5V min.                      |
| Chain wave         | 0.7V max.                      |

| N0. | Item                    | IR-CUT specification            |
|-----|-------------------------|---------------------------------|
| 1   | Drive impedance         | $240 \pm 10\% \Omega$ (at 20°C) |
| 2   | Operating voltage range | DC4~6V (in 1 minute)            |
| 3   | Operating temperature   | - 20°C ~ + 70°C                 |

|        | RED | BLACK | GLASS |
|--------|-----|-------|-------|
| IN→OUT | -   | +     | 有     |
| OUT→IN | +   | -     | 無     |

| Connect pin assignment & Color |          |        |   |        |       |
|--------------------------------|----------|--------|---|--------|-------|
| 1                              | Dumping+ | Yellow | 1 | Drive+ | Red   |
| 2                              | Dumping- | Orange | 2 | Drive- | Black |
| 3                              | Drive+   | Brown  |   |        |       |
| 4                              | Drive-   | Red    |   |        |       |

