


P-IRIS系列

Application

For Security & Surveillance System
CCTV Lens Van-Focal Auto Iris

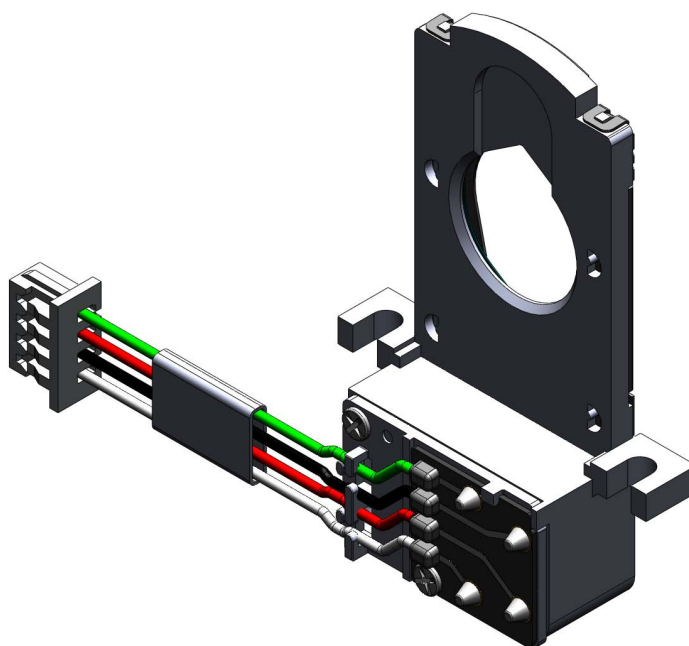



Specification 21AON0800012

NO.	Item	Specification
1	Aperture diameter	Φ8.4
2	Driving resistance	28.5Ω±10%(at 20°C)
3	Minimum starting voltage	2.6V(AT 100pps /2-2PHASE EXCITATION)
4	Open→close	87±8 steps
5	Durability temperature range	- 30°C ~ + 60°C

兩線圈勵磁方式及順序
OPEN→CLOSE:0→3 CLOSE→OPEN:3→0

Step	A	$\bar{A}$	B	$\bar{B}$
0	H	L	H	L
1	L	H	H	L
2	L	H	L	H
3	H	L	L	H

Open基準勵磁: A: H, $\bar{A}$: L, B: H, $\bar{B}$: L

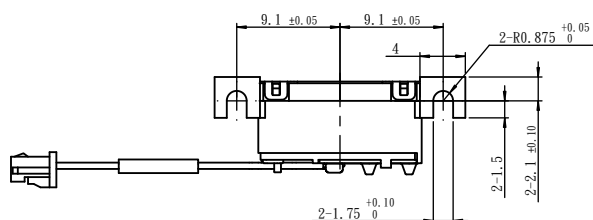

4 Green
3 Red
2 Black
1 White

注: -CONNECTOR: 參考MOLEX同零件 51021-0400 (PITCH=1.25mm)
-TERMINAL: 參考MOLEX同零件 50038/50079
-WIRE: UL3302 AWG #32
-HOUSING: A2001H-4P

